(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 22 January 2004 (22.01.2004)

PCT

(10) International Publication Number WO 2004/007974 A1

(51) International Patent Classification7:

F15B 11/24

(21) International Application Number:

PCT/SE2003/001213

(22) International Filing Date:

15 July 2003 (15.07.2003)

(25) Filing Language:

Swedish

(26) Publication Language:

English

(30) Priority Data:

0202203-6


15 July 2002 (15.07.2002)

(71) Applicants (for US only): DAHLSTRÖMMagnus (heir of the deceased inventor) [SE/SE]; Fjallgatan 22, SE-116 28, Stockholm (SE). VIKTORSSON Lisa (heir of the deceased inventor) [SE/SE]; Bergmansgatan 20, SE-983 35, Malmberget (SE). DAHLSTRÖM Johanna (heir of the deceased inventor) [SE/SE]; Centralvagen 3, 3tr, SE-186 31, Vallentuna (SE). DAHLSTRÖM SARA (heir of the deceased inventor) [SE/SE]; Dalbovagen 4 B, SE-191 45, Sollentuna (SE).

- (71) Applicant and
- (72) Inventor: SEGERLJUNG, Max [SE/SE]; Penglund 112, S-911 94 Vännäs (SE).
- (72) Inventor: DAHLSTRÖM (deceased).
- (74) Agents: OLSSON, Jan et al.; Bjerkéns Patentbyrå KB, Box 1274, S-801 37 Gävle (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO,

[Continued on next page]

(54) Title: A HYDRAULIC SYSTEM

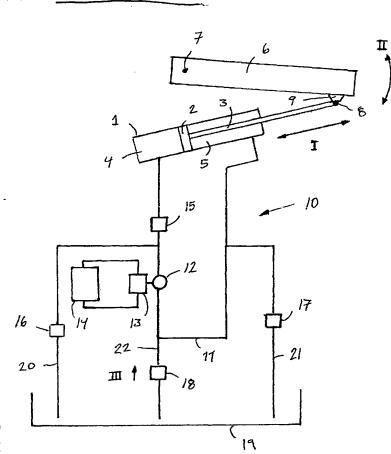

(57) Abstract: The invention concerns a hydraulic system comprising at least one hydraulic drive means (1), a conduit system (10) connected to the hydraulic drive means for conveying hydraulic liquid to and from the hydraulic drive means, where the conduit system comprises a conduit circuit (11) containing hydraulic liquid, connected to the hydraulic drive means, a pump (12) for generating a flow of hydraulic fluid in the conduit system and a motor (13) to power the pump. The pump (12) is arranged to control the flow of hydraulic liquid in said circuit (11), and the hydraulic drive means (1) is controllable substantially only by controlling the flow of hydraulic liquid in said circuit (11) by means of the pump (12).

